


GNSS Surveying Antenna

GLA228i

Product outline and drawing

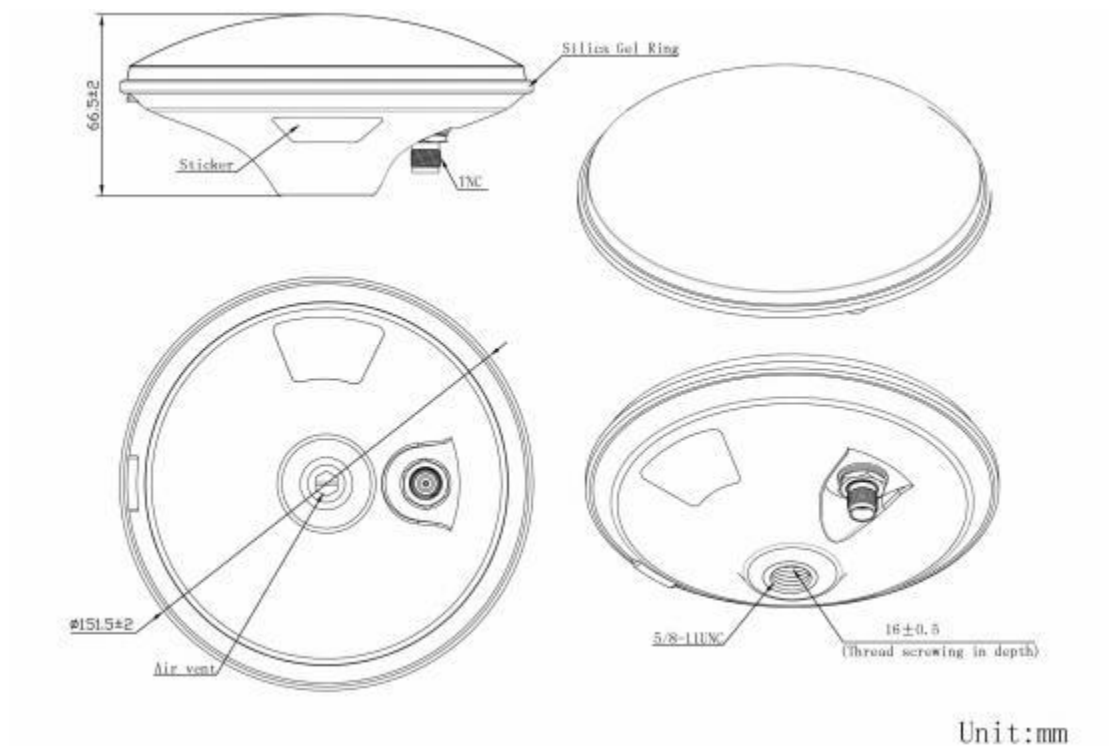


GLOBAL EAST ASIA(HongKong) TECHNOLOGY CO.,LTD

Specifications

Item		Specifications
Antenna	Frequency	GPS L1/L2/L5 GLONASS G1/G2/G3 COMPASS B1/B2/B3 Galileo E1/L1/E2/E5a/E5b/E6
	Polarization	RHCP
	Axial Ratio	≦3dB
	V.S.W.R	≦1.5
	Peak Gain	≧5dBi
	Impedance	50Ω
	Phase Center Error	±2mm
	Horizontal coverage angle	360°
LNA	Gain	40±2dB
	Noise Figure	≦1.5dB
	Passband fluctuation	±1.5dB
	Supply Voltage	3~12V DC
	Current Consumption	≦50mA
	V.S.W.R	≦2.0
Mechanical	Connector	TNC-K
	Radome Material	ASA
	Mounting Method	Screw
Environmental	Operating Temperature	-40℃~+85℃
	Relative Humidity	Up to 95%
	Ingress Protection	IP67 (exclude Air vent in screw hole)
	Environmentally Friendly	ROHS Compliant

Antenna Reference Point&Phase Center

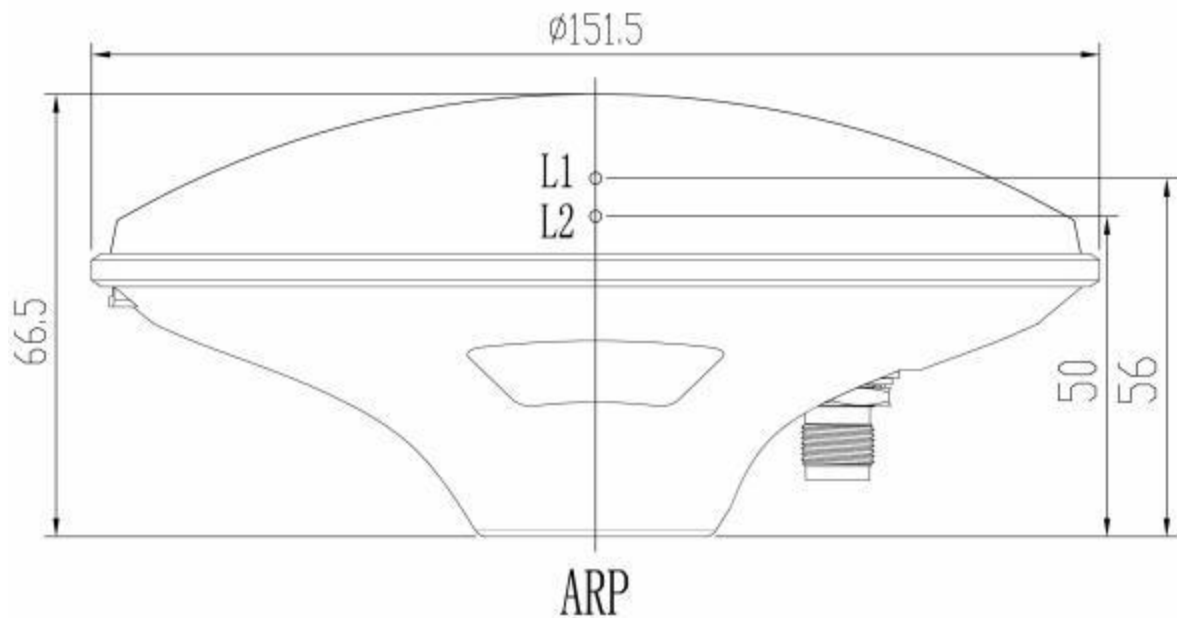

Mechanical Offsets Units in “mm”