


XQY-PS3-0.5/6-NE

【一、产品参数Parameters/规格指标Specifications】

频率范围 Frequency Range	500 ~ 6000 MHz/0.5 -6GHz
插入损耗 Insertion Loss	≤ 2.8 dB (未含理论损耗 Excluding theoretical loss 4.8 dB)
合路端驻波 Combined port VSWR	Typ.1.26 / Max.1.5
分配端驻波 Distribution port VSWR	Typ.1.18 / Max.1.4
隔离度 Isolation	Typ.25dB / Min.18dB
幅度平衡 Amplitude Balance	± 0.8dB
相位平衡 Phase Balance	±8°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	N-Female
承受功率 Power Rating	Splitter 20W (功分器用时) ;Combiner 1W(合路器用时)
工作温度 Operation Temperature	-35℃ ~ +75℃
表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
外形尺寸 Outline Dimensions	130*74*20 (mm)
重量 Weight	510 (g)

【二、规格草图Draft specifications】

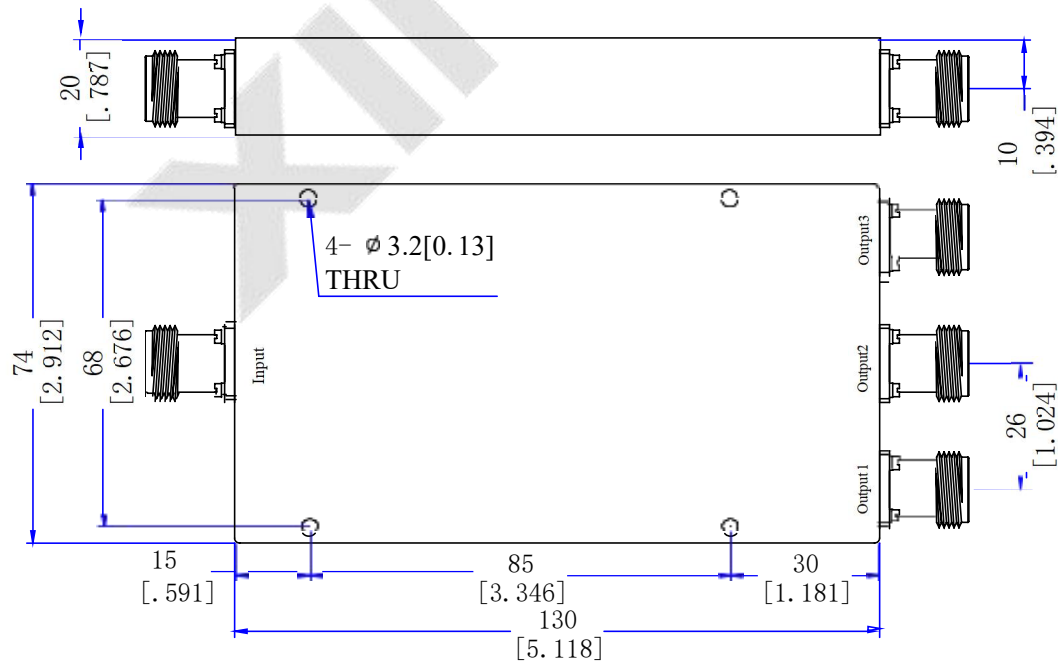

注: 尺寸(mm/[英寸]) , 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)